



16Ports 1000Mbps Managed PoE Switch with 4Ports 2.5G SFP+

IPv6/IPv4
ACL/QoS

MSTP
RSTP

6KV
Lightning Protection



SP7500-16GP4XF-L2

Key Features:

Ports: Provide 16*1000Mbps PoE ports with 4 Ports 2.5G SFP+ Uplink

Self-adaption: RJ45 port supports 1000Mbps Auto MDI/MDIX

Fiber Port: 4 Ports 2.5G SFP+ Uplink

Wide Application: Designed for Wifi AP and IP Security camera.VoIP etc

Managed: Support remote web managed,VLAN and storm contro and IPV6 managementl etc.

Surge protection: Protect the device from lighting surges and others electrical hazards

Considerate Design: Exquisite compact size.wall mounted with fanless design

Easy to use: Plug and play, No configuration required

Installation: Rack mount with easy installation

Introducing a new Gigabit Managed POE Switch for future-proof deployments

Benchu Group 16-Port Gigabit Web Smart PoE+ Switch with 16 1000BASE-T PoE+ ports and four 2.5G SFP+ slots,It delivers advanced management features with an 256Gbps switching capacity. The SP7500-16GP4XF-L2 is equipped with 1000BASE-T PoE+ ports that provide higher gigabit speeds capable of up to 1000Mbps over existing Cat5e or better cabling. This switch provides eight PoE+ connections with a Max power budget of 300W, and supplies up to 30W of power per port for devices such as wireless access points, PTZ IP cameras, and VoIP telephony systems.

1000Mbps Capability for Diversified Bandwidth Applications

With the terminal access rates of 802.11ac wireless APs reaching as high as 1Gbps, Gigabit ports has been unable to satisfy the demand. Supporting 1Gbps capability and 802.3af/at PoE output, the SP7500-16GP4XF-L2 can deliver not only data to 802.11ac wireless APs, but also power to other powered devices such as APs and IP cameras.

2.5 Gbps SFP Ports Optimize Network Performance

The SP7500-16GP4XF-L2 provides greater bandwidth and powerful processing capacity. It offers a maximum 10Gbps uplink bandwidth through the Four 2.5Gbps SFP+ ports. In addition, the administrator can flexibly choose the suitable SFP/SFP+ transceiver according to the transmission distance or the transmission speed required to extend the network efficiently.

Cost-effective IPv6 Managed Gigabit Ethernet Switch Solution

With layer 2+ managed Gigabit Ethernet Switch, It provides IPv6/IPv4 management and built-in L2/L4 Gigabit Switching engine, and supports high-speed transmission of surveillance images and videos.

Surge Protection Design

Reaching 6KV surge protection, the Ethernet ports owns the capacity to keep the Ethernet Switch from lightning strikes and other electrical surges, offering reliable performance even in some harsh environments.

SP7500-16GP4XF-L2

16 ports 1000Mbps Managed PoE Switch with 4 Ports 2.5G SFP+ Uplink

Technical Datasheet

Model	SP7500-16GP4XF-L2	
Hardware Specifications		
Connector	16 10/100/1000BASE-T RJ45 auto MDI/MDIX ports	
	4 2.5G Base-X SFP+ Slots Uplink	
	1 Console port	
Uplink port	4 2.5G Base-X SFP+ Slots	
LED Display	Power Indicator: PWR(green).	
	Network Indicator: Link(yellow)	
	POE: Orange	
	SFP: Green	
Thermal Fan	Fanless Design	
Network Standard	IIEEE 802.3u 100BASE-TX/100BASE-FX	
	IEEE 802.3z 1000BASE-SX/LX	
	IEEE 802.3ab 1000BASE-T	
	IEEE 802.3bz 2.5Gb/s Ethernet	
	IEEE 802.3x flow control and back pressure	
	IEEE802.3az EEE	
Switch Architecture	Store and Forward	
Transmission model	IEEE802.3X full-duplex and Backpressure half-duplex	
Switch Performance	Backplane bandwidth	256Gbps
	Packet forwarding rate	72.6Mpps
	MAC address	32k
Power requirement	AC100-240V 50/60Hz	
ESD Protection	6KV ESD	
Dimension	440mm x 290mm x 44.5mm(17.32in x 11.42in x 1.75in)	
Weight	4kg	
Environment	Operating temperature: -20℃~55℃， operating humidity: 5%~95%	
	Storage temperature: -40℃~75℃， storage humidity: 5%~95%	
Safety	FCC Part15 Class A,CE,RoHs	


Power over Ethernet (PoE) Specifications		
PoE Standard	IEEE 802.3af Power over Ethernet/PSE	
	IEEE 802.3at Power over Ethernet Plus/PSE	
PoE Supply Type	1/2(+), 3/6(-) End-span	
PoE Power Output	Per Port 52V DC, 300mA. max. 15.4 watts (IEEE 802.3af)	
	Per Port 52V DC, 600mA. max. 30 watts (IEEE 802.3at)	
PoE Power budget	300W	

Layer 2 Functions	
Port Mirroring	TX / RX / both Many-to-1 monitor
Vlan	802.1Q tagged-based VLAN Up to 256 VLAN groups, out of 4094 VLAN IDs 802.1ad Q-in-Q tunneling Voice VLAN;Protocol VLAN;Private VLAN (Protected port),GVRP
Link Aggregation	IEEE 802.3ad LACP and static trunk Supports 8 groups of 8-port trunk
Spanning Tree Protocol	STP, IEEE 802.1D Spanning Tree Protocol RSTP, IEEE 802.1w Rapid Spanning Tree Protocol MSTP, IEEE 802.1s Multiple Spanning Tree Protocol
IGMP Snooping	IGMP (v2/v3) snooping IGMP querier Up to 256 multicast groups
MLD Snooping	MLD (v1/v2) snooping, up to 256 multicast groups
Access Control List	IPv4/IPv6 IP-based ACL / MAC-based ACL
PoE Management	Open or close port Standard POE scheduling management Power and current display Automatic restarting function of equipment dead machine Timing Support IP bindings restarting
QoS	8 mapping ID to 8 level priority queues --- Port number --- 802.1p priority --- 802.1Q VLAN tag --- DSCP field in IP packet Traffic classification based, strict priority and WRR
Security	IEEE 802.1X port-based authentication Built-in RADIUS client to co-operate with RADIUS server RADIUS / TACACS+ user access authentication IP-MAC port binding MAC filtering Static MAC address DHCP Snooping and DHCP Option82 STP BPDU guard, BPDU filtering and BPDU forwarding DoS attack prevention ARP inspection
Management Function	
Basic Management Interfaces	Web browser / Telnet / SNMP v1, v2c, V3 Firmware upgrade by HTTP / TFTP protocol through Ethernet network Remote / Local Syslog, System log, LLDP protocol ,SNTP
Secure Management Interfaces	SSH, SSL, SNMP
SNMP MIBs	RFC 1213 MIB-II RFC 1215 Generic Traps RFC 1493 Bridge MIB RFC 2674 Bridge MIB Extensions RFC 2819 RMON (1, 2, 3, 9) RFC 2863 Interface Group MIB RFC 3635 Ethernet-like MIB


SP7500-16GP4XF-L2

16 ports 1000Mbps Managed PoE Switch with 4 Ports 2.5G SFP+ Uplink


Interfaces

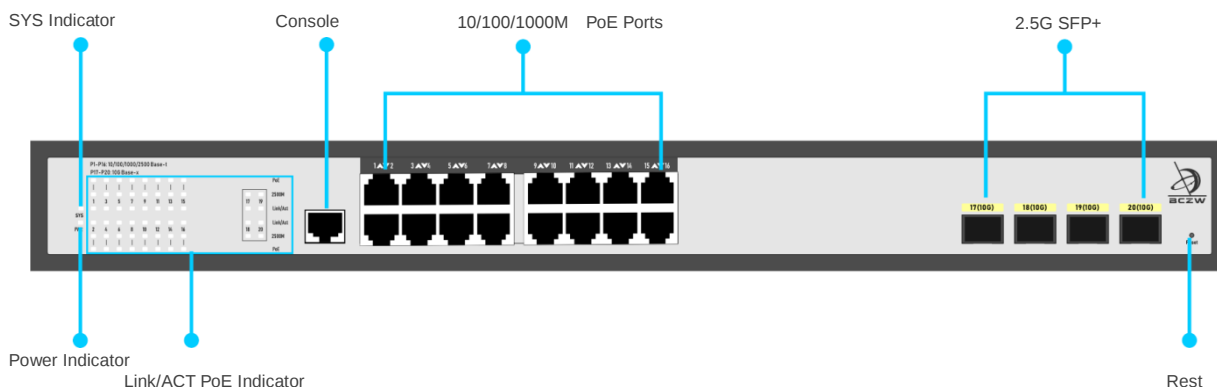

Structure Diagrams

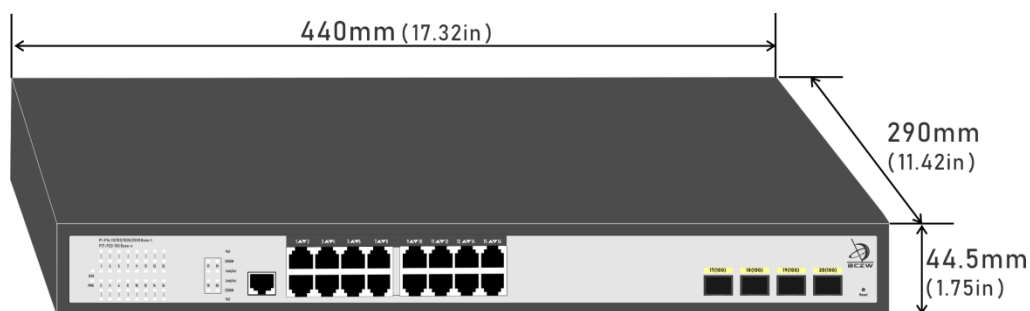

Applications

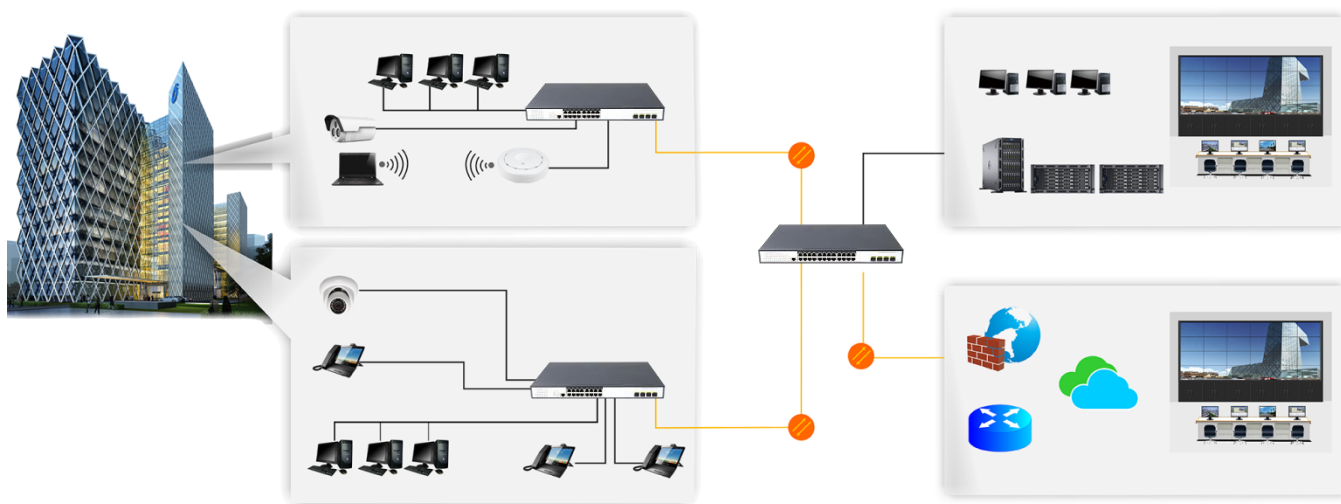

Ordering Information

SP7500-16GP4XF-L2

16 Ports 10/100/1000Mbps Managed PoE switch with 4 Ports 2.5G SFP+ Uplink, 6KV surge protection