



## 8-Port 10/100/1000Mbps Ultra PoE Switch with 2 Gigabit SFP Uplink



SP7200-8PGE2GF-4BT

### Key Features:

**Ports:** Provide 8\*10/100/1000Mbps PoE+ ports and 2 Gigabit SFP Uplink

**PoE Standard:** IEEE802.3af/at/btPower over Ethernet (PoE) Compliant

**Total Power:** Total power budget of 300W and 1-4ports with 60W output, 5-8port with 30W output

**Self-adaption:** RJ45 port supports 10/100/1000Mbps Auto MDI/MDIX

**Wide Application:** Designed for Wifi AP and IP Security camera.VoIP etc

**Surge protection:** Protect the device from lighting surges and others electrical hazards

**Considerate Design:** Exquisite compact size with fanless design

**Easy to use:** Plug and play, No configuration required


### Versatile PoE Port

Featuring 8\* 10/100/1000Mbps PoE ports which support IEEE802.3af/at/bt standard and 2 Gigabit SFP Uplink ports. the Benchu Group Ultra PoE switch provides Maximun power budget of 300W and 60W for PoE ports (1-4ports) sepectively,allowing users to have several different Networking products configured



### 802.3bt PoE++ 60watt Power over 8-pair UTP

Ultra PoE switch adopts the IEEE 802.bt PoE++ standard and PoH technology, it is capable to source up to 65 watts of power by using all the four pairs of standard Cat5e/6 Ethernet cabling to deliver power and full-speed data to each remote PoE compliant powered device (PD)

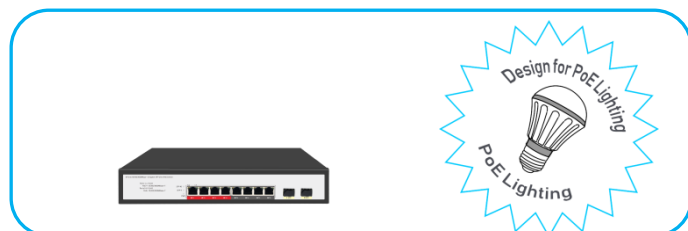

### Surge Protection Design

Reaching 6KV surge protection, the PoE ports owns the capacity to keep the Ultra PoE Switch from lightning strikes and other electrical surges, offering more reliable performance even in some harsh environments.



# SP7200-8PGE2GF-4BT

8-Port 10/100/1000M Ultra PoE Switch with 2 Gigabit SFP Uplink



## Technical Datasheet

Model	SP7200-8PGE2GF-4BT	
Hardware Specifications		
Network Connector	8 10/100/1000BASE-T RJ45 auto MDI/MDIX ports	
	2 1000BASE-X SFP	
PoE Port	4 10/100/1000Mbps POE+ PSE port	
	4 10/100/1000Mbps POE++ PSE port	
LED indicators	Power Indicator: PWR(green).	
	Network Indicator: Link(green).	
	PoE Working Indicator: PoE(yellow)	
Switch Architecture	Store and Forward	
Transmission model	IEEE802.3X full-duplex and Backpressure half-duplex	
Switch Performance	Backplane bandwidth	24Gbps
	Packet forwarding rate	17.86Mpps
	MAC address	8k
Power requirement	AC100-240V 50/60Hz	
ESD Protection	6KV ESD	
Dimension(WxDxH)	330mm x 220mm x 44.5mm(12.99in x 8.66in x 1.75in)	
Weight	3.5Kg	
Power over Ethernet (PoE) Specifications		
Network standard	IEEE802.3i 10 BASE-T	
	IEEE802.3u 100 BASE-TX	
	IEEE 802.3ab Gigabit 1000BASE-T	
	IEEE802.3x Flow Control	
	IEEE802.3af Power over Ethernet	
	IEEE802.3at Power over Ethernet	
	IEEE802.3bt Power over Ethernet（1-4 port）	
	IEEE802.3az EEE	
PoE Standard	IEEE 802.3af/at Power over Ethernet/PSE	
	IEEE 802.3bt Power over Ethernet Plus/PSE	
PoE Supply Type	12/45(+), 36/78(-)	
PoE Power Output	Per Port 52V DC, 300mA. max. 15.4 watts (IEEE 802.3af)	
	Per Port 52V DC, 600mA. max. 30 watts (IEEE 802.3at)	
	Per Port 52V DC, 1200mA. max. 60 watts (IEEE 802.3bt)（1—4 Ports）	
PoE Power budget	300W	
Environment		
Safety	FCC Part15 Class A,CE,RoHs	
Environment specification	Operating temperature: -20℃~55℃，operating humidity: 5%~95%	
	Storage temperature: -20℃~75℃，storage humidity: 5%~95%	


# SP7200-8PGE2GF-4BT

8-Port 10/100/1000M Ultra PoE Switch with 2 Gigabit SFP Uplink


## Interfaces

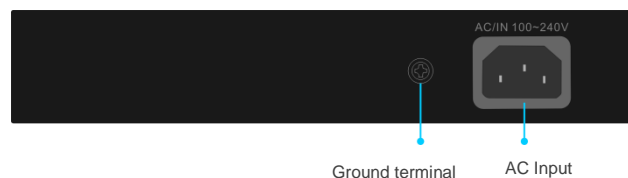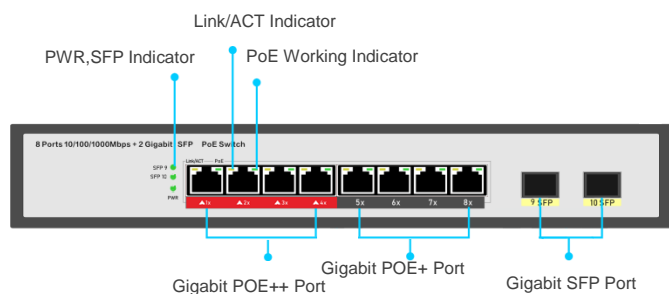

## Structure Diagrams

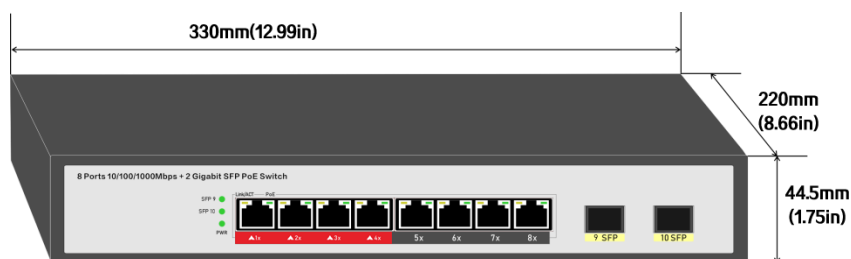

## Applications

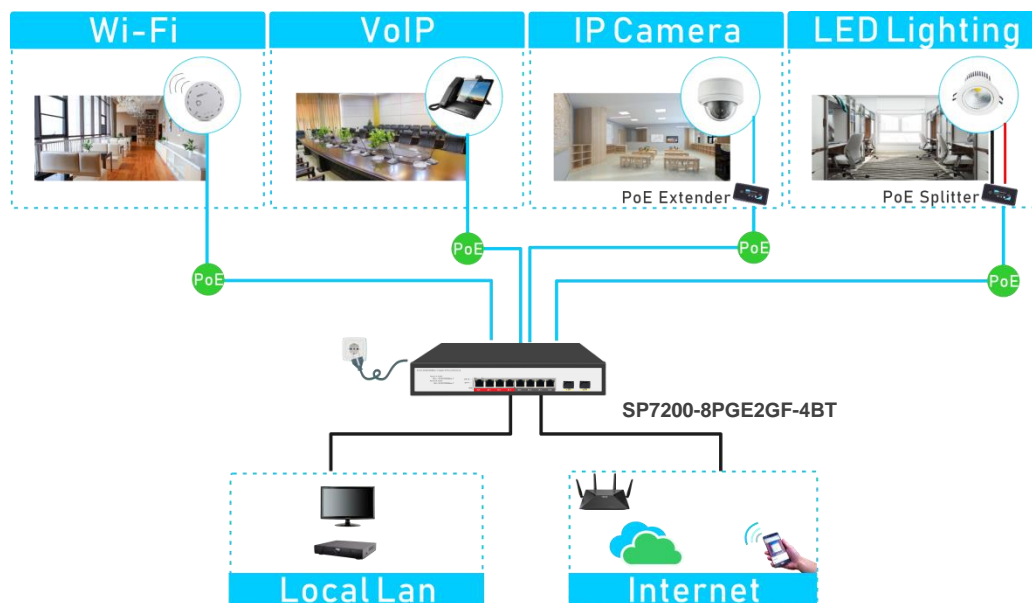

## Ordering Information

SP7200-8PGE2GF-4BT

8 Ports 10/100/1000Mbps Ultra PoE switch with 2 Gigabit SFP Uplink, 6KV surge protection, 1-4 Ports 60W.