



## 24Ports 2500Mbps Managed PoE Switch with 4Ports 10G SFP+



SP7500-24XP4TF-L2

IPv6/IPv4  
ACL/QoS

MSTP  
RSTP

6KV  
Lightning Protection

### Key Features:

**Ports:** Provide 24\*2500Mbps Ethernet ports with 4 Ports 10G SFP+ Uplink

**Self-adaption:** RJ45 port supports 2500Mbps Auto MDI/MDIX

**Fiber Port:** 4 Ports 10G SFP+ Uplink

**Wide Application:** Designed for Wifi AP and IP Security camera.VoIP etc

**Managed:** Support remote web managed,VLAN and storm contro and IPV6 managementl etc.

**Surge protection:** Protect the device from lighting surges and others electrical hazards

**Considerate Design:** Exquisite compact size.wall mounted with fanless design

**Easy to use:** Plug and play, No configuration required

**Installation:** Rack mount with easy installation

### Introducing a new Multi-Gigabit Managed POE Switch for future-proof deployments

Benchu Group 24-Port 2.5G Web Smart PoE+ Switch with eight 2.5GBASE-T PoE+ ports and four 10G SFP+ slots,It delivers advanced management features with an 256Gbps switching capacity. The SP7500-24XP4TF-L2 is equipped with 2.5GBASE-T PoE+ ports that provide higher gigabit speeds capable of up to 2.5Gbps over existing Cat5e or better cabling. This switch provides eight PoE+ connections with a Max power budget of 300W, and supplies up to 30W of power per port for devices such as wireless access points, PTZ IP cameras, and VoIP telephony systems.

### 2.5Gbps Capability for Diversified Bandwidth Applications

With the terminal access rates of 802.11ac wireless APs reaching as high as 1.2Gbps to 2.6Gbps, Gigabit ports has been unable to satisfy the demand. Supporting both 1Gbps and 2.5Gbps capability and 802.3af/at POE output, the SP7500-16XG4TF-L2 can deliver not only data to 802.11ac wireless APs, but also power to other powered devices such as APs and IP cameras.

### 10 Gbps SFP Ports Optimize Network Performance

The SP7500-24XG4TF-L2 provides greater bandwidth and powerful processing capacity. It offers a maximum 20Gbps uplink bandwidth through the two 10Gbps SFP+ ports. In addition, the administrator can flexibly choose the suitable SFP/SFP+ transceiver according to the transmission distance or the transmission speed required to extend the network efficiently.

### Cost-effective IPv6 Managed Gigabit Ethernet Switch Solution

With layer 2+ managed Gigabit Ethernet Switch, It provides IPv6/IPv4 management and built-in L2/L4 Gigabit Switching engine, and supports high-speed transmission of surveillance images and videos.

### Surge Protection Design

Reaching 6KV surge protection, the Ethernet ports owns the capacity to keep the Ethernet Switch from lightning strikes and other electrical surges, offering reliable performance even in some harsh environments.

# SP7500-24XP4TF-L2

24 ports 2500Mbps Managed PoE Switch with 4 Ports10G SFP+ Uplink

## Technical Datasheet

Model	SP7500-24XP4TF-L2	
Hardware Specifications		
Connector	24 10/100/1000/2500BASE-T RJ45 auto MDI/MDIX ports	
	4 10G Base-X SFP+ Slots Uplink	
	1 Console port	
Uplink port	4 10G Base-X SFP+ Slots	
LED Display	Power Indicator: PWR(green).	
	Network Indicator: Link(yellow)	
	POE: Orange	
	SFP: Green	
Thermal Fan	Fanless Design	
Network Standard	IIEEE 802.3u 100BASE-TX/100BASE-FX	
	IEEE 802.3z 1000BASE-SX/LX	
	IEEE 802.3ab 1000BASE-T	
	IEEE 802.3bz 2.5GBASE-T	
	IEEE 802.3ae 10Gb/s Ethernet	
	IEEE 802.3x flow control and back pressure	
	IEEE 802.3ad port trunk with LACP	
	IEEE 802.1D Spanning Tree Protocol	
	IEEE 802.1w Rapid Spanning Tree Protocol	
	IEEE 802.1s Multiple Spanning Tree Protocol	
	IEEE 802.1p Class of Service	
	IEEE 802.1Q VLAN tagging	
	IEEE 802.1x Port Authentication Network Control	
	IEEE 802.1ab LLDP	
	IEEE 802.3af Power over Ethernet	
	IEEE 802.3at Power over Ethernet Plus	
Switch Architecture	Store and Forward	
Transmission model	IEEE802.3X full-duplex and Backpressure half-duplex	
Switch Performance	Backplane bandwidth	256Gbps
	Packet forwarding rate	96.72Mpps
	MAC address	32k
Power requirement	AC100-240V 50/60Hz	
ESD Protection	6KV ESD	
Dimension	440mm x 290mm x 44.5mm(17.32in x 11.42in x 1.75in)	
Weight	4.5kg	
Environment	Operating temperature: -20℃~55℃， operating humidity: 5%~95%	
	Storage temperature: -40℃~75℃， storage humidity: 5%~95%	
Safety	FCC Part15 Class A,CE,RoHs	

## Layer 2 Functions

Port Mirroring	TX / RX / both    Many-to-1 monitor
Vlan	802.1Q tagged-based VLAN Up to 256 VLAN groups, out of 4094 VLAN IDs 802.1ad Q-in-Q tunneling Voice VLAN;Protocol VLAN;Private VLAN (Protected port),GVRP
Link Aggregation	IEEE 802.3ad LACP and static trunk Supports 8 groups of 8-port trunk
Spanning Tree Protocol	STP, IEEE 802.1D Spanning Tree Protocol RSTP, IEEE 802.1w Rapid Spanning Tree Protocol MSTP, IEEE 802.1s Multiple Spanning Tree Protocol
IGMP Snooping	IGMP (v2/v3) snooping IGMP querier Up to 256 multicast groups
MLD Snooping	MLD (v1/v2) snooping, up to 256 multicast groups
Access Control List	IPv4/IPv6 IP-based ACL / MAC-based ACL
PoE Management	Open or close port Standard POE scheduling management Power and current display Automatic restarting function of equipment dead machine Timing Support IP bindings restarting
QoS	8 mapping ID to 8 level priority queues --- Port number --- 802.1p priority --- 802.1Q VLAN tag --- DSCP field in IP packet Traffic classification based, strict priority and WRR
Security	IEEE 802.1X port-based authentication Built-in RADIUS client to co-operate with RADIUS server RADIUS / TACACS+ user access authentication IP-MAC port binding MAC filtering Static MAC address DHCP Snooping and DHCP Option82 STP BPDU guard, BPDU filtering and BPDU forwarding DoS attack prevention ARP inspection


## Management Function

Basic Management Interfaces	Web browser / Telnet / SNMP v1, v2c, V3 Firmware upgrade by HTTP / TFTP protocol through Ethernet network Remote / Local Syslog, System log, LLDP protocol ,SNTP
Secure Management Interfaces	SSH, SSL, SNMP
SNMP MIBs	RFC 1213 MIB-II RFC 1215 Generic Traps RFC 1493 Bridge MIB RFC 2674 Bridge MIB Extensions RFC 2819 RMON (1, 2, 3, 9) RFC 2863 Interface Group MIB RFC 3635 Ethernet-like MIB


# SP7500-24XP2TF-L2

24 ports 2500Mbps Managed PoE Switch with 4 Ports 10G SFP+ Uplink


## Interfaces

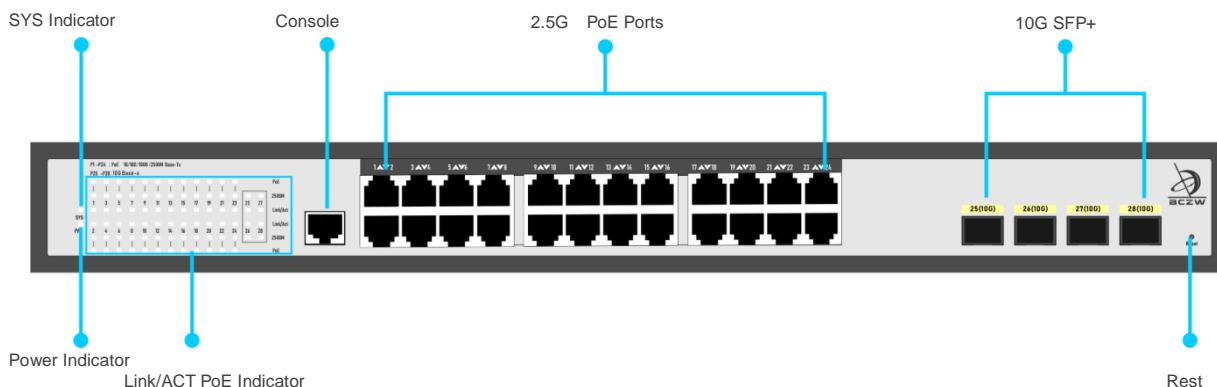

## Structure Diagrams

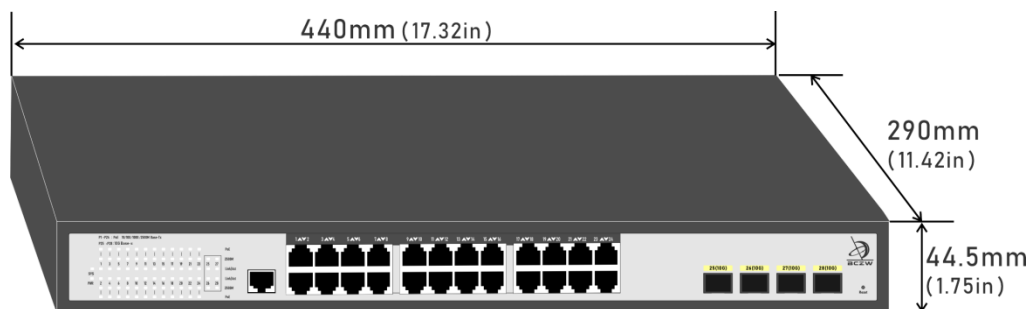

## Applications

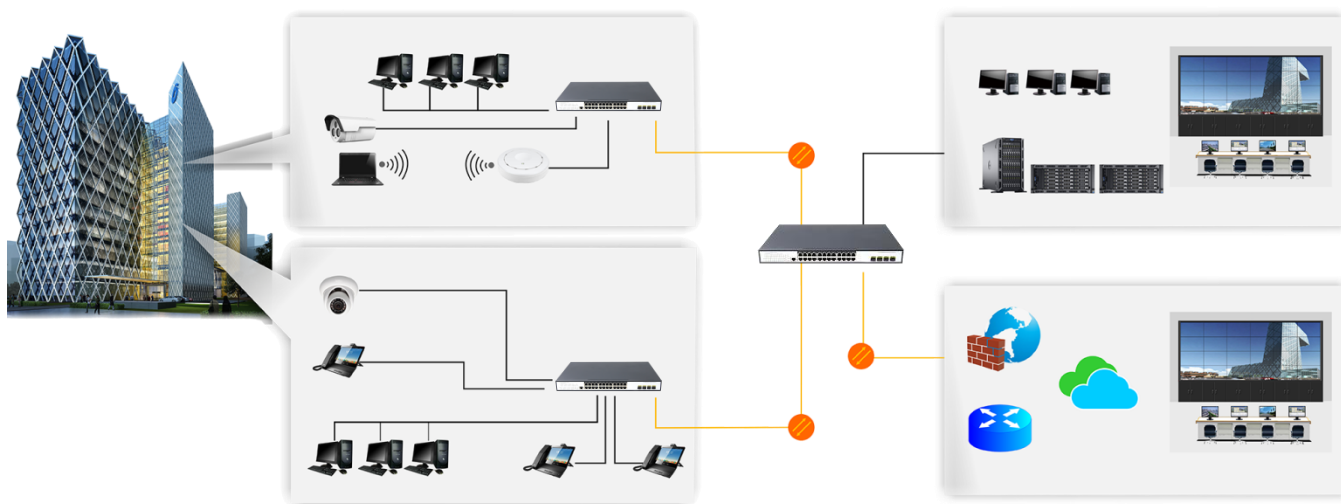

## Ordering Information

SP7500-24XP4TF-L2

24 Ports 10/100/1000/2500Mbps Managed switch with 4 Ports 10G SFP+ Uplink, 6KV surge protection